


**NOTE: UNLESS OTHERWISE SPECIFIED**

1. CABLE ASSEMBLY MUST WITHSTAND 4.5 KG OF FORCE IN ANY DIRECTION WITHOUT ANY DAMAGE TO THE CONNECTORS, ELECTRICAL CONNECTIONS OR CABLE.

2. ELECTRICAL CONNECTIONS OF THE CABLE TO ID CONNECTOR MUST REMAIN GAS TIGHT (150 GRAMS OF CONTACT FORCE) FOR 5 YRS AT 50°C.

3. 20 CONDUCTOR, 26 GA. STRANDED RIBBON CABLE.

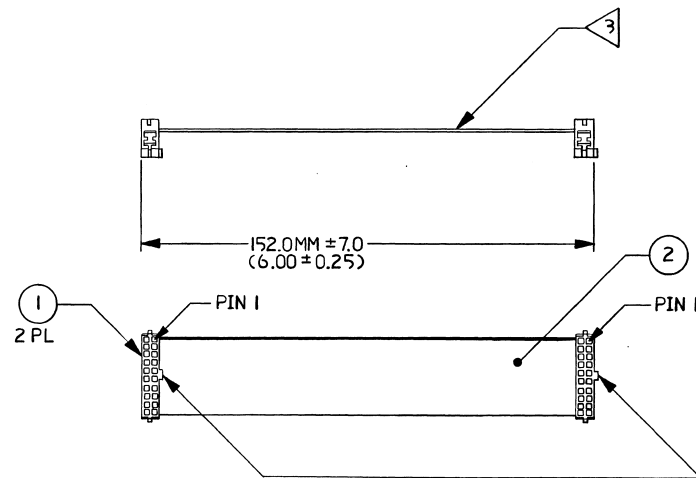

KEYS ON BOTH CONNECTORS MUST BE ORIENTATED IN THIS POSITION.

REV	ZONE	ECO #	REVISION	APPD	DATE
A		F080	INITIAL RELEASE		
A		F207	PRODUCTION RELEASE	MM	6 JAN 84

SEE SEPARATE BILL OF MATERIAL:590-0167

METRIC <small>DIMENSIONS ARE IN MILLIMETERS TOLERANCES: X.X - ANGLES - XX - DO NOT SCALE DRAWING</small>		apple computer inc. NOTICE OF PROPRIETARY PROPERTY THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF APPLE COMPUTER, INC. THE POSSESSOR AGREES TO THE FOLLOWING: (i) TO MAINTAIN THIS DOCUMENT IN CONFIDENCE (ii) NOT TO REPRODUCE OR COPY IT (iii) NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART	
MATERIAL: DRIFT: SQ 5/83 ENG. APPR: [Signature] 1/83 RELEASE: [Signature] 1/83 IN. NUMBER: B.BULL		TITLE: ASSY, INTERNAL CABLE, 3 1/2 INCH DRIVE SCALE: FULL SIZE: c DRAWING NUMBER: 590-0167-A SHEET: 1/1	

590-0167-A  
1/1